Flexible Mounting Solution.

i3LYFT_M


On the move? The i3LYFT_M gives you the same smooth electrical height adjustment, but allows you to take your interactive display anywhere you need it. The height of your interactive display can be adjusted effortlessly to the height of the user and the mobile mount allows you to take it from boardroom to classroom, making it easily accessible for everyone.



SKU	10010536
Lifting Speed	35 mm/s
Maximum Load	100 kg
Stroke	650 mm
VESA	800x 600 mm
Screen size	55-86 inch
Caster Dimension	4 inch
Color	Black
Control Mode	Controller/APK
Anti collision	✓
Overall Dimension	1,036× 738× (1,111.8-1,761.8) mm
Package Dimension	1,124× 814× 189 mm
Net Weight	34.7 Kg
Gross Weight	39.7 Kg

ACCESSORIES & DOCUMENTS

Screw Kit	* 1	
Power Cord EU	× 1	
USB cable	x 1	
Wired Remote Control	× 1	
Wall Mount Bracket	× 2	
User Manual	× 1	
Power Cord IEC C13 Socket to IEC C14	Plug 1,3m × 1	









i3LYFT_M


i3LYFT_M

ENVIRONMENTAL CONDITIONS

Operation Temperature	0 ~ 40 °C
Operation Humidity	10 ~ 90 %
Storage Temperature	-20 ~ 40 °C
Storage Humidity	10 ~ 90 %



DIMENSIONS

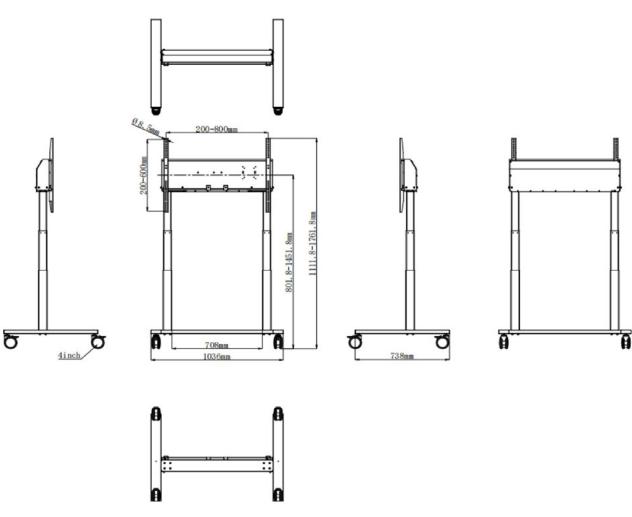

NOTICE

The product pictures of this specification are only indicative, actual product may have slight difference in product effects (included but not limited to appearance, color and size). Due to the influence of product configuration and manufacturing process, the actual size/weight of the product may differ.

Efforts have been made to check that information provided here to be correct and complete at the time of publication. Subject to change without prior notice.





